


Plain Round Bollard 1200mm Above Ground 90mm - 152mm Diameter Galvanised & Yellow

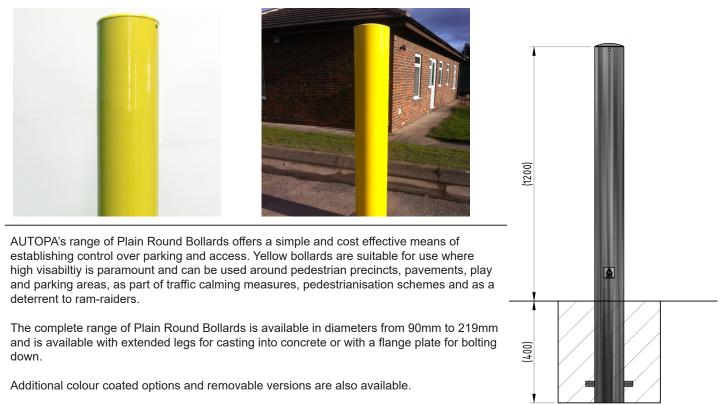

Part Number	Description	Weight (kg)
138 121 275Y	90mm Galvanised & Yellow - Concrete In	10kg
138 121 274Y	90mm Galvanised & Yellow - Bolt Down	10kg
138 121 426Y	114mm Galvanised & Yellow - Concrete In	13kg
138 121 401Y	114mm Galvanised & Yellow - Bolt Down	13kg
138 121 513Y	127mm Galvanised & Yellow - Concrete In	24kg
138 121 501Y	127mm Galvanised & Yellow - Bolt Down	24kg
138 121 682Y	152mm Galvanised & Yellow - Concrete In	30kg
138 121 656Y	152mm Galvanised & Yellow - Bolt Down	30kg

Product details

- 3mm wall thickness
- Concrete in 400mm (below ground)

- Round flange plate 180mm x 5mm 76mm to 114mm diameters
- Square flange plate 250mm sq x 10mm 127mm to 193mm diameters
- 3/4 bolts required per bollard (round/square flange)

Installation & use

Bolt down to a suitable concrete surface. Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete. Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete. Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk &44 (0)1788 550556

 bsi.
 ISO 9001:2015 Quality
 ISO 14001:2015 Management
 ISO 14001:2015 Management
 ISO 9501 Management

 FM 31071
 EMS 503166
 OHS 552103

AUTOPA Limited Cottage Leap, Rugby, Warwickshire CV21 3XP