

## Diamond Top Bollard 80mm, 100mm or 150mm Galvanised & Colour






The AUTOPA Diamond Top Bollard is a square, galvanised mild steel bollard with a pressed steel, fully welded cap. The Diamond Top Bollard is an elegantly simple bollard, ideal for providing protection against unauthorised parking or access. The Diamond Top Bollard is ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The Diamond Top Bollard is available in galvanised and galvanised & coated finishes.

Also available ragged for casting in to concrete, flanged for bolting down or removable. Fixing down bolts for the flanged version, and padlock to secure the removable version are available at an extra cost.

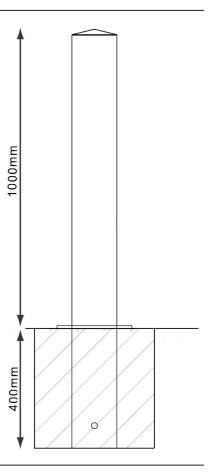

Part Number	<u>Description</u>	Lift Weight (kg)	Weight (kg)
138 121 990C	80mm x 80mm, Galvanised & Colour - Concrete In		10kg
138 121 991C	80mm x 80mm, Galvanised & Colour - Bolt Down		10kg
138 121 992C	80mm x 80mm, Galvanised & Colour - Removable	10kg	14kg
138 121 900C	100mm x 100mm, Galvanised & Colour - Concrete In		13kg
138 121 899C	100mm x 100mm, Galvanised & Colour - Bolt Down		13kg
138 121 901C	100mm x 100mm, Galvanised & Colour - Removable	13kg	21kg
138 121 906	150mm x 150mm, Galvanised & Colour - Concrete In		32kg
138 121 910C	150mm x 150mm, Galvanised & Colour - Bolt Down		32kg
138 121 909C	150mm x 150mm, Galvanised & Colour - Removable	32kg	40kg

## **Product details**

- · 1000mm height above ground
- 3mm wall thickness 80mm and 100mm diameters
- Socket 220mm (below ground) 80mm diameter
- · Concrete in (400mm below ground)
- 5mm wall thickness 150mm diameter
- Socket 300mm (below ground) 100mm 150mm diameters

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete.

Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete.

Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

