


KeyPAC® Solo

AC TYPE 2

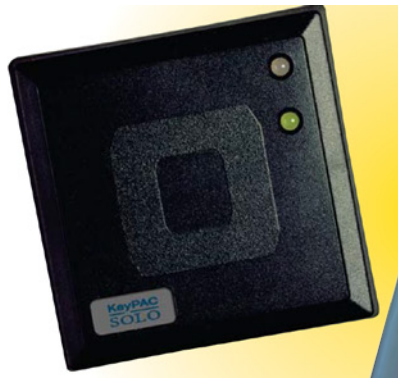

The KeyPAC® Solo is a low cost and easy to install standalone reader / controller.


Available in three housings, the single door access control system comes with dual LEDs and a built-in sounder that can be programmed to issue a local alarm when a door is left open or forced.

KEY FEATURES

- Up to 2,000 users
- Up to 200mm reading range
- Bi-directional reading (Standard & Universal)*
- Anti-tamper protected
- Easy to install
- Simple to use
- KeyPAC (125KHz) proximity technology
- Supplied with two master KeyPAC ID cards for programming
- Maintenance free and suitable for interior or exterior use
- Standard and Universal models are designed to fit a standard MK™ backbox
- Can be used as a secure switch allowing many types of equipment to be turned on or off e.g. alarm systems
- 5 year guarantee against electronic failure
- Lifetime guarantee against electronic failure on PAC proximity cards and tokens

* For correct bi-directional operation please refer to the user guide

TYPICAL SYSTEM CONFIGURATION

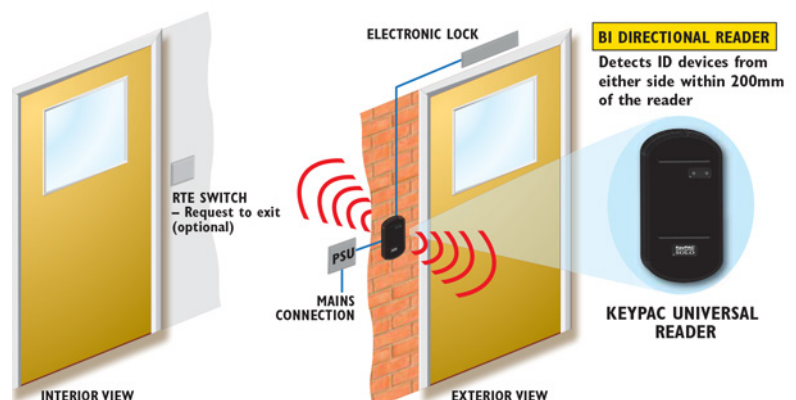


FEATURES AND SPECIFICATIONS


Description	KeyPAC Solo Standard Black
	KeyPAC Solo Universal Black
	KeyPAC Solo Vandal Resistant
ID Technology	KeyPAC (125KHz) Proximity technology
Dimensions	Standard: H: 86mm W: 86mm D: 15mm
	Universal: H: 140mm W: 80mm D: 22mm
	Vandal: H: 100mm W: 100mm D: 14mm
Maximum Read Range	Up to 200mm (7.87 in.)
Environment	IP66 - Indoor/Outdoor weather resistant
Current	Idle: 85mA
	Relay Activated: 120mA
	Lock relay: Single pole change over 2A at 30V max
Voltage	12V DC (nominal), tolerance +10.5V to +20V
Recommended Cable	Type Standard alarm cable
Operating Temperature	-20° to +55° C
Operating Humidity	0 to 90% relative humidity non-condensing
Audiovisual Indication	Red and Green LEDs and audible sounder
Tamper Output	Tamper loop fitted
Specific parts	KeyPAC Solo Vandal Resistant requires a vandal screwdriver or a Yankee 8 bit screw
Certifications	73/23/EEC, ETS 300.300, ETS 300.683

ORDERING INFORMATION


Part Number	Description
21631	KeyPAC Solo – Standard Black
21632	KeyPAC Solo – Universal Black
21630	KeyPAC Solo – Vandal Resistant



Universal KeyPAC Solo



Standard KeyPAC Solo

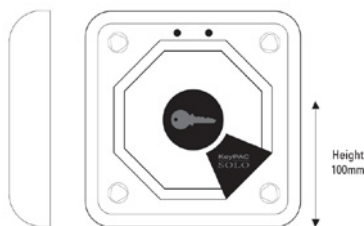

Vandal Resistant KeyPAC Solo



21030 KeyPAC ISO Proximity Card



20250 KeyPAC Token

20019 KeyPAC ID Wallet
10 KeyPAC tokens with
10 Shadow cards



20018 KeyPAC ID Wallet
10 KeyPAC cards with
10 Shadow cards



21030/5.00 KeyPAC Master Card
Available individually as a
replacement card

Master Card - How to add/delete cards/keys
Present Master Card to unit three times
Two beeps and yellow LED indicates edit mode
Present card/keys to unit
Green LED indicates cards/keys added to unit
Red LED indicates cards/keys deleted from unit
Present Master Card to exit

1950 Screwdriver for Vandal Resistant Screws
For use with 21630



Axis Automatic Entrance Systems Ltd

Unit 6, Queens Park Industrial Estate, Studland Road,
Northampton, NN2 6NA.

Tel: 01604 212500 · Fax 01604 212495

Email: sales@axisautomatic.com

www.axisautomatic.com