



Pr**fix**[®]



QUICK GUIDE:

Profix[®] Ultra-Low Profile Screed System



The Profix[®] Panel is
manufactured in the UK

Profix® Panel

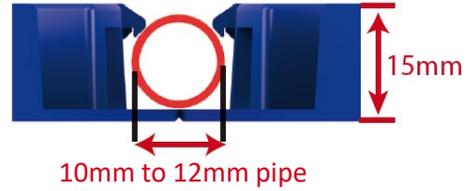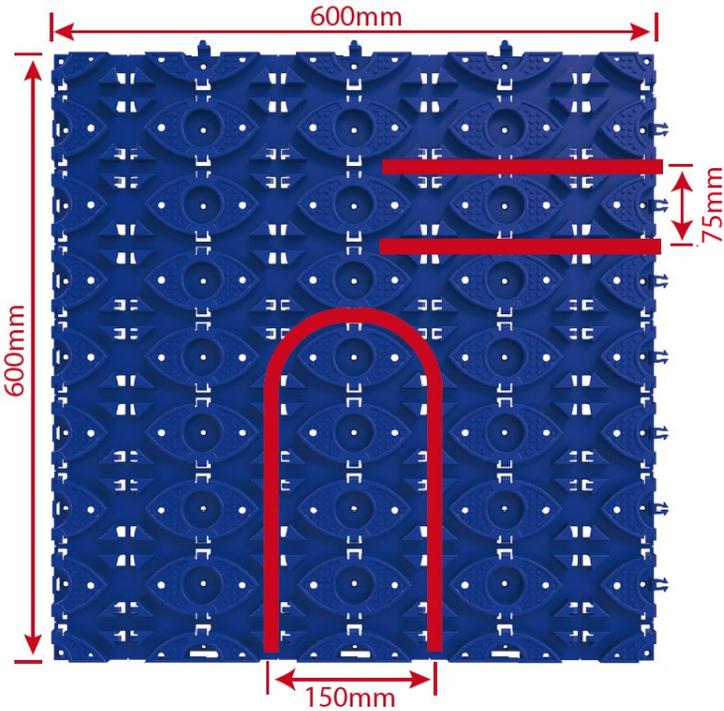


The Profix® Panel is an extremely robust injection-moulded plastic pipe-retention panel (made from 100% recycled plastic) designed for 10mm to 12mm diameter UFH pipe. When used in combination with a thin layer of Profix® Levelling Compound or a pumped cement-based flowing screed, this system provides an ultra-low profile, high heat output, fast response floor heating solution suitable for both retrofit and new build projects.

The Profix® Panel is a patented product specially designed for use as an integral part of a high performance warm-water underfloor heating system.

Features and Benefits



SELF-ADHESIVE BACKING

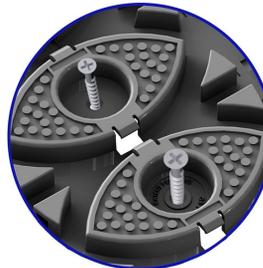


'FIXING POINT'
within every 'eye'
(for use if required)




'SNAP-CLIPS' connect
the panels together



'DROP & LOCK'
features enable the panels
to fully interlock

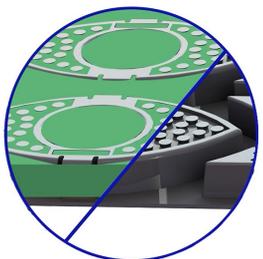

'STRUCTURAL KEY'
for levelling compound
or flowing screed

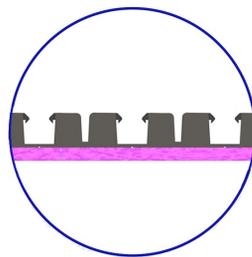

Available with pre-bonded
XPS insulation backing
(3mm, 6mm, or 10mm)

Heat Output

Table

		MEAN WATER TEMPERATURE									
		30°	30°	35°	35°	40°	40°	45°	45°	50°	50°
SYSTEM TYPE	FLOOR COVERING	Heat Output W/m ²	Floor Surface Temp °C	Heat Output W/m ²	Floor Surface Temp °C	Heat Output W/m ²	Floor Surface Temp °C	Heat Output W/m ²	Floor Surface Temp °C	Heat Output W/m ²	Floor Surface Temp °C
Profix® Ultra-Low-Profile Screed	Tiles	56.6	25.2	84.9	27.8	113.2	30.4	141.5	33.1	169.8	35.7
	LVT	40.2	23.7	60.3	25.6	80.4	27.4	100.5	29.3	120.6	31.1
	15mm Engineered Wood	37.0	23.4	54.0	25.1	73.0	26.4	91.3	28.2	109.8	30.1
	Carpet & Underlay (1.5 TOG)	30.0	22.8	45.0	24.1	60.0	25.5	75.0	26.9	90.0	28.3

*For Guidance only - all systems must conform to BS EN 1264

Profix® Levelling Compound

Profix® Levelling Compound is a bagged dry powder which when mixed with water becomes a high-flow, fast setting, self-smoothing screed providing an ideal surface for Tiles, Vinyl (LVT), Linoleum, Engineered Wood, or Carpet & Underlay.


Profix® Levelling Compound should be mixed and poured as detailed in the Profix® Levelling Compound Data Sheet, ensuring the following **minimum** overall thicknesses are observed:

Tiles / Engineered Wood Flooring

Minimum overall screed thickness = 15mm

LVT / Linoleum / Carpet

Minimum overall screed thickness = 18mm

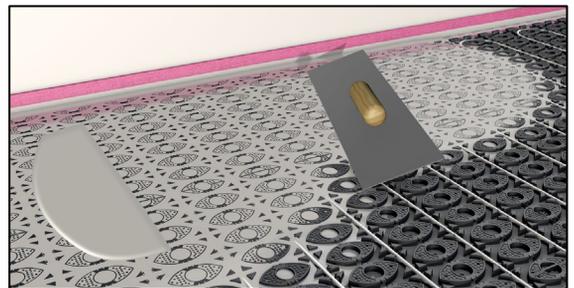

Cementitious Flowing Screed

A pumped cement-based flowing screed can be used as an alternative to Profix® Levelling Compound but it must meet the following minimum structural specifications:

Compressive strength (after 28 days) 30N/mm²

Flexural strength (after 28 days) 5N/mm²



Profix[®]



01923 725 180



sales@epicinsulation.co.uk



www.profixpanel.co.uk



The Profix[®] Panel is
manufactured in the UK