

Fig 1. Side view of SN9/65B stair nosing.


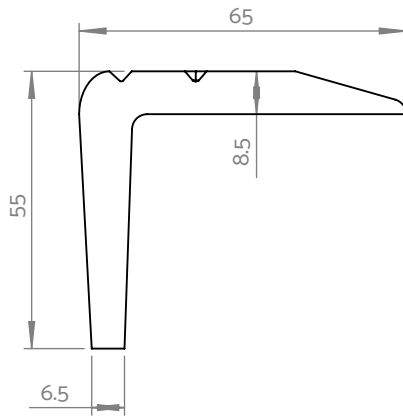


Fig 2. Plan view of SN9/65B stair nosing.

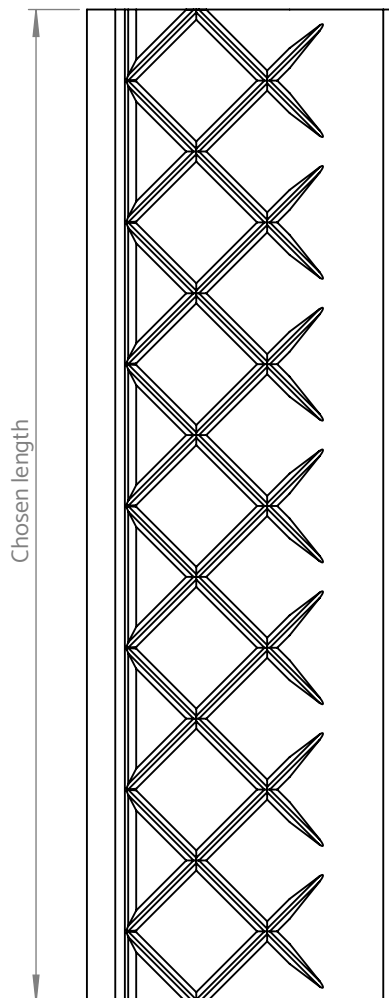

Item: AATi™ type SN9/65B® - HDLT™ anti-slip stair nosing with unique bevelled back edge and silicon carbide granules cast into the metal matrix of the wearing surface. This is a protected and registered design:

® - Protected by European Registered Design No. 003 101 112-0003.

™ - HDLT (Heavy duty London transport) Trademark registration No. 2530 171.

Application: This anti-slip stair nosing is suitable for many different applications and exhibits the same longevity and hard wearing/heavy duty characteristics as our larger profile nosings. Suitable for highly populated interior & exterior applications.

Materials: Nickel Bronze, Gunmetal, Aluminium & Cast Iron (*zinc plated black). Different materials increase the longevity of the product, please speak to AATi technical team for further information.

Environment: Metals are sustainably sourced coming from predominantly recycled origins and all the metals we use through our production process can be 100% recycled in our factory.

Compliance: This stair nosing design complies with British Standards BS 8300 & Building Regulations (Document K). Please speak to our technical team to assist with selecting the correct product and material for your application and for information on light reflectance values.

Cut to suit: Stair nosings can be produced to suit any stair width (Fig 2). Individual profiles can be made up to 1500mm in Cast Aluminium, Nickel Bronze & Gunmetal. Cast Iron (*zinc plated black is only available in max length of 1.2m. Longer lengths shall be supplied in multiple pieces. All products are supplied cut to length, pre-drilled and countersunk with production drawings submitted for client approval.

Fig 3. 3D view SN9/65B stair nosing.

