

Fig 1. Side view of FP1/301 floor plate.





Fig 2. Plan view of FP1/301 floor plate.

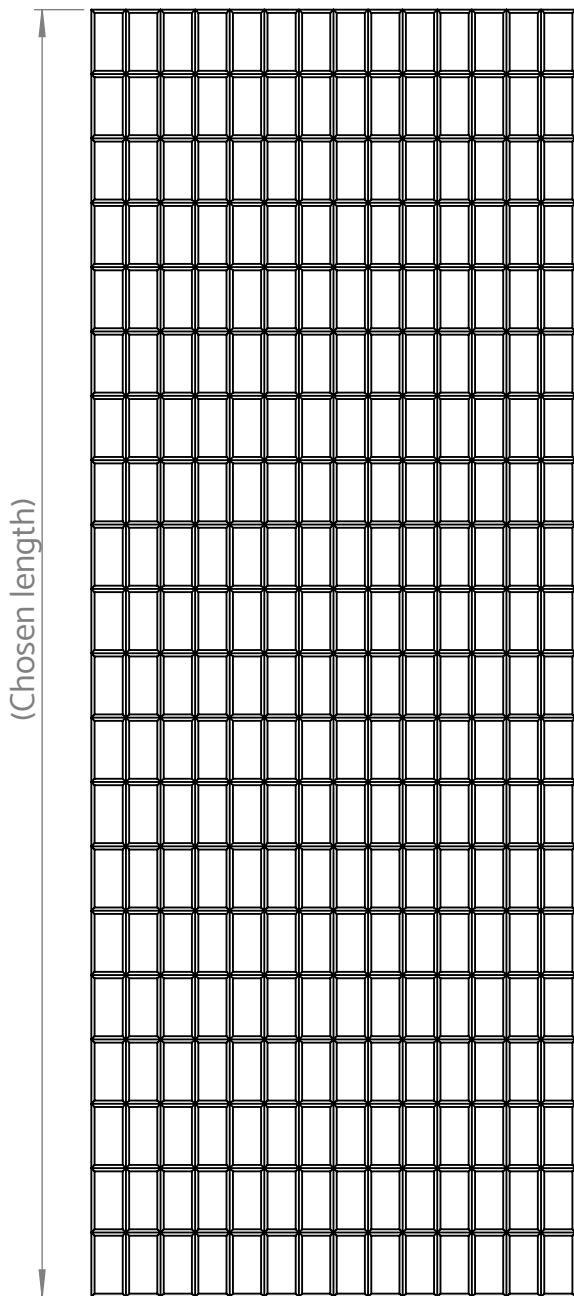

Item: AATi™ type FP1/301® - Cast metal anti-slip floor plate with unique silicon carbide granules cast into the metal matrix of the wearing surface. Groove pattern to match Sightline™ & Wideline™. Sightline™ & Wideline™ are registered, design-Protected by UK Registered Design No. 3019008

Application: For extremely heavily used public stairs and landings requiring high anti-slip and anti-wear performance. This robust cast metal anti-slip floor plate profile offers exceptional slip resistant properties and ensures safe performance in wet or dry conditions. This profile is suitable for many different applications including London Underground stations, Crossrail stations, mass transport terminals, Network Rail stations, AFA bridges, light Rail, commercial developments, stadiums and countless more.

Materials: Nickel Bronze, Gunmetal, Aluminium & Cast Iron (*zinc plated black). Different materials increase the longevity of the product, please speak to AATi technical team for further information.

Environment: Metals are sustainably sourced coming from predominantly recycled origins and all the metals we use through our production process can be 100% recycled in our factory.

Compliance: This anti-slip floor plate provides colour contrast & slip resistance in accordance with British Standards BS 8300 & Building Regulations Part M & K. Please speak to our technical team to assist you with selecting the correct product and material for your application. Information on light reflectance values available upon request.

Cut to suit: Anti-slip floor plates can be produced to suit any stair or landing width (**Fig 2**). Individual profiles supplied as standard 301mm width and can be made up to 1900mm in Cast Aluminium, Nickel Bronze & Gunmetal. Cast Iron (*zinc plated black is only available in max length of 1.5m). Longer lengths shall be supplied in multiple pieces. All products are supplied cut to length, pre-drilled and countersunk with production drawings submitted for client approval.

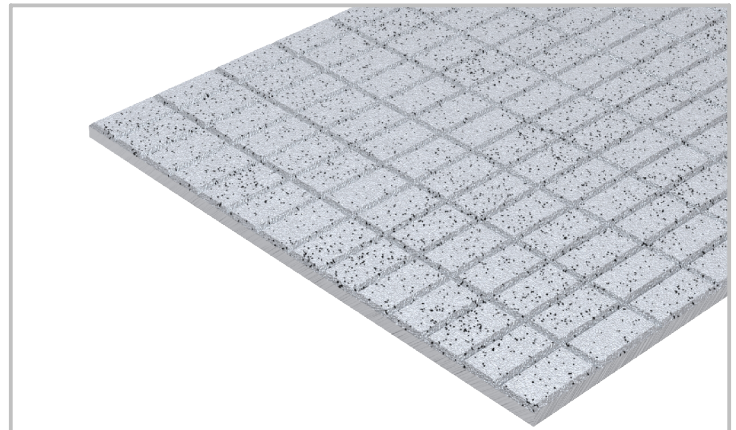


Fig 3. 3D view of FP1/301 floor plate